


**Maßtabelle für Wellringdichtungen
nach Werknorm 41-32 in Anlehnung an DIN EN 1514-4**

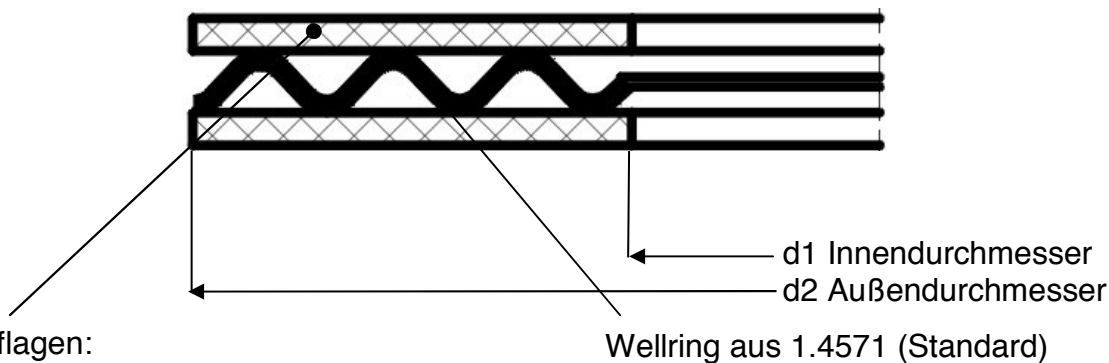

Auflagen:

- Weichstoff (Graphit, Glimmer,...)
- PTFE
- Sonderwerkstoffe

Maße in mm *)

DN	d1	d2					
		PN 10	PN 16	PN 25	PN 40	PN 63	PN 100
10	18	48				58	
15	22	53				63	
20	27	63				74	
25	34	73				84	
32	43	84				90	
40	49	94				105	
50	61	109				115	121
65	77	129				140	146
80	89	144				150	156
100	115	164	170		176	183	
125	141	194	196		213	220	
150	169	220	226		250	260	
200	220	275	286	293	312	327	
250	273	330	343	355	367	394	
300	324	380	386	403	420	461	
350	356	440	446	460	477	515	
400	407	491	498	517	549	575	
450	458	541	558	567	574	-	
500	508	596	620	627	631	708	
600	610	698	737	734	750	819	
700	712	813	807	836	-	956	
800	813	920	914	945	-	-	
900	915	1020	1014	1045	-	-	

Profilbeispiele:

WD10:
mit Weichstoffauflage



WD12:
teilbelegt mit
Weichstoffauflage



WD20:
mit Weichstoffauflage
und Innenbördel



*) Toleranzen nach DIN ISO 2768 Toleranzklasse V